



ELEKTRICKÉ LANOVÉ KLADKOSTROJE S KONZOLOVÝM POJEZDOVÝM VOZÍKEM
TYP GS,GSF,GSM 1608,2010,2512-2/1
NOSNOST 1600 AŽ 2500 kg.

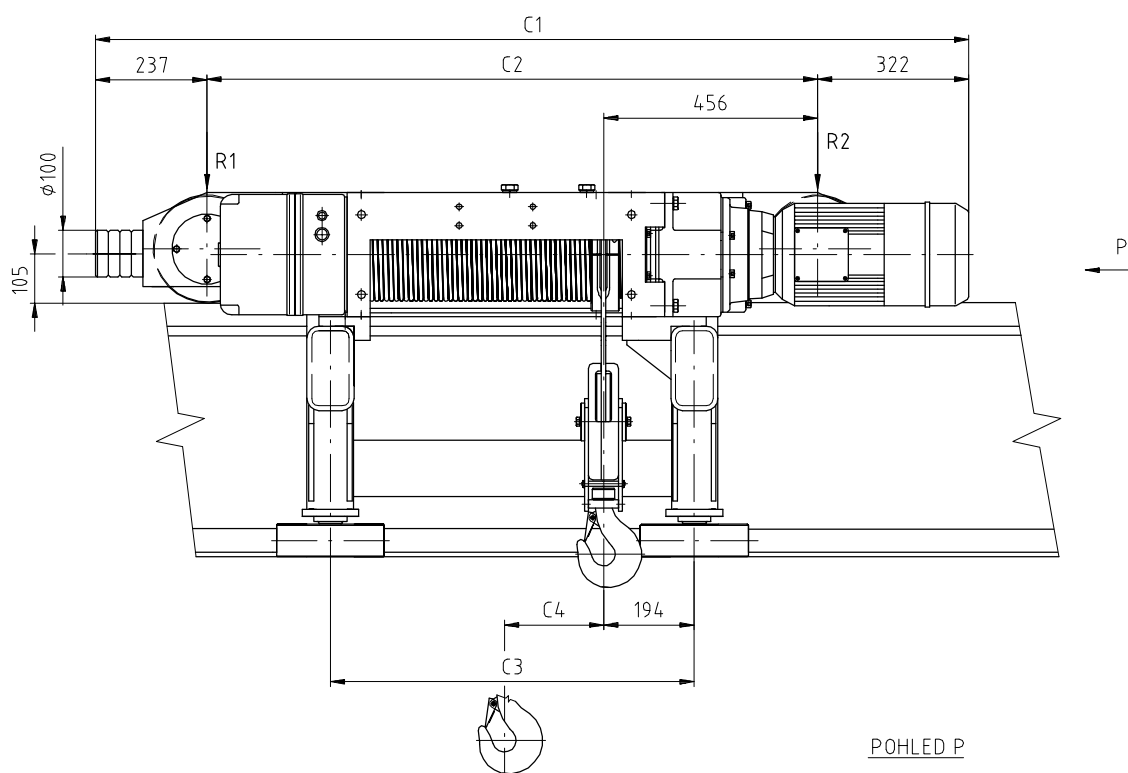

POHLED P

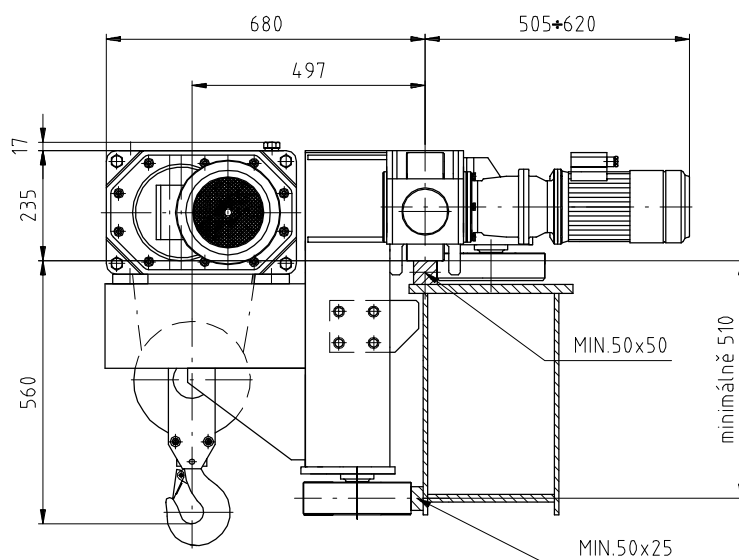

$$R1 = \frac{(456 + C4)}{C2} \times Q_{\max} + 0.4mg$$

$$R2 = \frac{(C2 - 456)}{C2} \times Q_{\max} + 0.6mg$$

$Q_{\max}$ =MAXIMÁLNÍ NOSNOST

mg =VLASTNÍ HMOTNOST KLADKOSTROJE

LANO ϕ 9mm									
TYP	6M	9M	12M	15M	18M	21M	24M	27M	30M
C1	1860	2110	2360	2610	2860	3110	3360	3610	3860
C2	1300	1550	1800	2050	2300	2550	2800	3050	3300
C3	775	1025	1275	1525	1775	2025	2275	2525	2775
C4	211	337	463	589	715	841	967	1093	1219